


General description

Perforated bands are designed for suspension of ventilation ducts, pipes and other equipments. Easy to fold and cut, GPB is a quick and competitive way for suspension. They can be used with M6, M8, M10 bolts, screws and rivets.




Technical specifications

MATERIAL : galvanized steel

For 6 mm diameter threaded rod

TYPE	WIDTH (W)	THICKNESS	MAX. RECOMMENDED LOAD
GPB - 176 OV	17 mm	0,60 mm	125 Kg

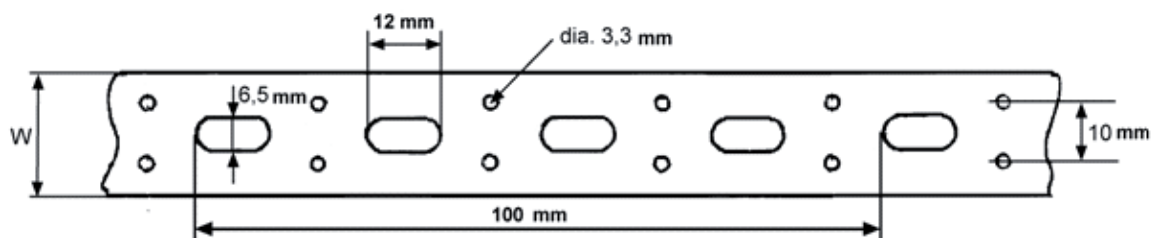


Information contained herein is based on careful tests and experience. It reflects our knowledge and is for guidance purpose only. It is given in good faith and user should ensure that the product is fit for purpose before any application. The quoted values are average and should not be taken as maximum or minimum values for specific purposes. Manufacturer and distributor are not responsible for any non-recommended use or consequential damage.

2016.04.07


For 8 mm diameter threaded rod

TYPE	WIDTH (W)	THICKNESS	MAX. RECOMMENDED LOAD
GPB - 176 RD	17 mm	0,60 mm	105 Kg
GPB - 206 RD	20 mm	0,60 mm	140 Kg
GPB - 208 RD	20 mm	0,75 mm	170 Kg
GPB - 258 RD	25 mm	0,75 mm	250 Kg
GPB - 259 RD	25 mm	0,90 mm	280 Kg

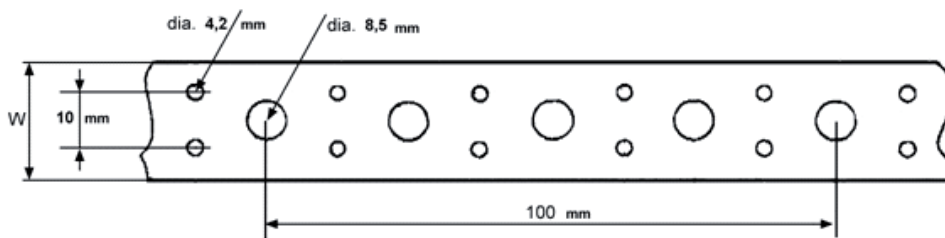

For 10 mm diameter threaded rod

TYPE	WIDTH (W)	THICKNESS	MAX. RECOMMENDED LOAD
GPB K - 258 OV	25 mm	0,75 mm	215 Kg
GPB K - 259 OV	25 mm	0,90 mm	260 Kg

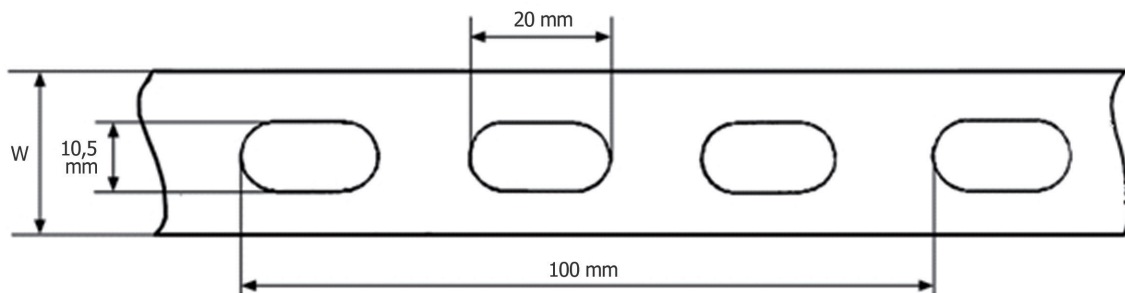

Information contained herein is based on careful tests and experience. It reflects our knowledge and is for guidance purpose only. It is given in good faith and user should ensure that the product is fit for purpose before any application. The quoted values are average and should not be taken as maximum or minimum values for specific purposes. Manufacturer and distributor are not responsible for any non-recommended use or consequential damage.

2016.04.07