

# T-3943 - IAD

## FLAT INSULATED GALVANIZED ACCESS DOORS

### General description

Access doors allow easy admittance to the ventilation ducting for the purpose of inspection and cleaning.

Galvanized access door with a double-sided panel insulated with 25 mm of glassfiber wool. Removable panel for easy access into rectangular duct.

They consist of one removable panel and one frame




### Technical description

- Galvanized steel frame 0.8mm – 1mm
- Galvanized steel double sided removable panel with 25 mm fiber glass insulation
- 2 or 4 galvanized steel wedgelock fasteners
- High quality EPDM sealing gasket

### Technical specifications

#### Dimensions

TYPE	OPENING		PANEL		OUTSIDE	
	A	B	C	D	E	F
IAD-24	116	207	150	240	195	285
IAD-38	197	332	240	375	288	425
IAD-50	325	462	367	500	418	548
IAD-65	460	608	500	650	550	700

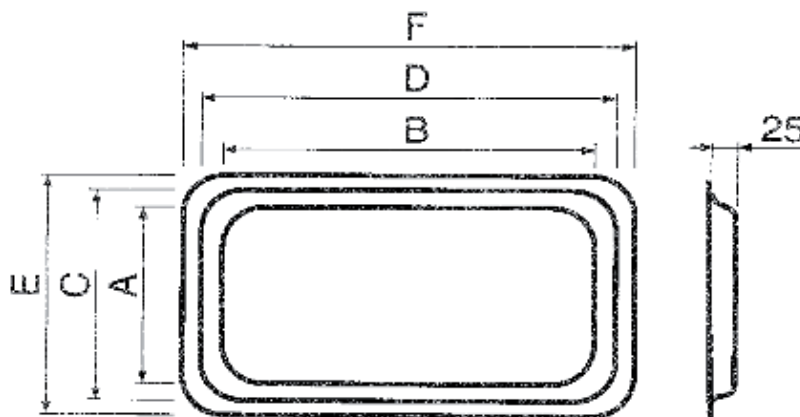

Information contained herein is based on careful tests and experience. It reflects our knowledge and is for guidance purpose only. It is given in good faith and user should ensure that the product is fit for purpose before any application. The quoted values are average and should not be taken as maximum or minimum values for specific purposes. Manufacturer and distributor are not responsible for any non-recommended use or consequential damage.

2016.04.22